

# Face Recognition Vendor Test Ongoing

## Still Face 1:1 Verification Application Programming Interface (API)

VERSION 4.0

Patrick Grother  
Mei Ngan  
Kayee Hanaoka  
*Information Access Division  
Information Technology Laboratory*

Contact via [frvt@nist.gov](mailto:frvt@nist.gov)

April 1, 2019



1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

## Table of Contents

1. FRVT 1:1 .....	2
1.1. Scope .....	2
1.2. General FRVT Evaluation Specifications.....	2
1.3. Time limits .....	2
2. Data structures supporting the API .....	2
3. Implementation Library Filename .....	2
4. API Specification.....	2
4.1. Header File .....	3
4.2. Namespace.....	3
4.3. Overview.....	3
4.4. API.....	4

## List of Tables

Table 1 – Processing time limits in milliseconds, per 640 x 480 image .....	2
Table 2 – Functional summary of the 1:1 application .....	3
Table 3 – Initialization .....	4
Table 4 – Template generation .....	5
Table 5 – Template matching .....	6

## List of Figures

Figure 1 – Schematic of 1:1 verification.....	3
---	---

26 **1. FRVT 1:1**

27 **1.1. Scope**

28 This document establishes a concept of operations and an application programming interface (API) for evaluation of face  
 29 recognition (FR) implementations submitted to NIST's ongoing Face Recognition Vendor Test. This API is for the 1:1  
 30 identity verification track. Separate API documents will be published for future additional tracks to FRVT. All images  
 31 include exactly one face.

32 **1.2. General FRVT Evaluation Specifications**

33 General and common information shared between all Ongoing FRVT tracks are documented in the FRVT General  
 34 Evaluation Specifications document - [https://www.nist.gov/system/files/documents/2019/03/20/frvt\\_common\\_1.0.pdf](https://www.nist.gov/system/files/documents/2019/03/20/frvt_common_1.0.pdf).  
 35 This includes rules for participation, hardware and operating system environment, software requirements, reporting, and  
 36 common data structures that support the APIs.

37 **1.3. Time limits**

38 The elemental functions of the implementations shall execute under the time constraints of Table 1. These time limits  
 39 apply to the function call invocations defined in section 3. Assuming the times are random variables, NIST cannot regulate  
 40 the maximum value, so the time limits are median values. This means that the median of all operations should take less  
 41 than the identified duration.

42 The time limits apply per image. When K images of a person are present, the time limits shall be increased by a factor K.

43 **Table 1 – Processing time limits in milliseconds, per 640 x 480 image**

Function	1:1 verification
Feature extraction enrollment	1000 (1 core) 640x480 pixels
Feature extraction for verification	1000 (1 core) 640x480 pixels
Matching	5 (1 core)

44 **2. Data structures supporting the API**

45 The data structures supporting this API are documented in the FRVT - General Evaluation Specifications document  
 46 available at [https://www.nist.gov/system/files/documents/2019/03/20/frvt\\_common\\_1.0.pdf](https://www.nist.gov/system/files/documents/2019/03/20/frvt_common_1.0.pdf), with corresponding  
 47 header file named *frvt\_structs.h* published at <https://github.com/usnistgov/frvt>.

48 **3. Implementation Library Filename**

49 The core library shall be named as *libfrvt\_11\_<provider>\_<sequence>.so*, with

- 50 • provider: single word, non-infringing name of the main provider. Example: acme
- 51 • sequence: a three digit decimal identifier to start at 000 and incremented by 1 every time a library is sent to  
52 NIST. Example: 007

53 Example core library names: *libfrvt\_11\_acme\_000.so*, *libfrvt\_11\_mycompany\_006.so*.

54 Important: Public results will be attributed with the provider name and the 3-digit sequence number in the submitted  
 55 library name.

56 **4. API Specification**

57 FRVT 1:1 participants shall implement the relevant C++ prototyped interfaces in Section 4.4. C++ was chosen in order to  
 58 make use of some object-oriented features.

60    **4.1. Header File**


61    The prototypes from this document will be written to a file named **frvt11.h** and will be available to implementers at  
 62    <https://github.com/usnistgov/frvt>.

63    **4.2. Namespace**

64    All supporting data structures will be declared in the FRVT namespace. All API interfaces/function calls for this track will  
 65    be declared in the `FRVT_11` namespace.

66    **4.3. Overview**

67

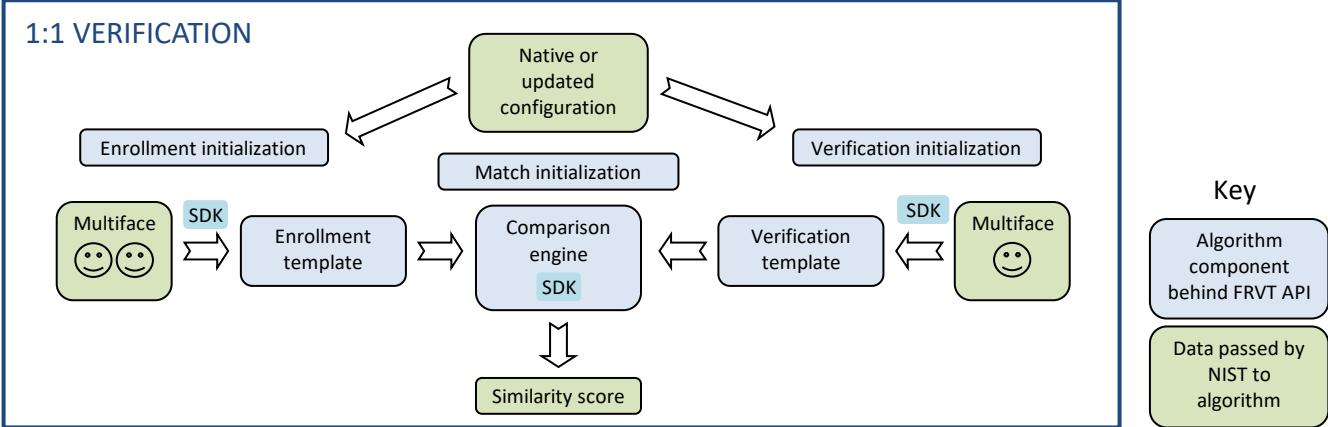

68                          **Figure 1 – Schematic of 1:1 verification**

69

70

71    The 1:1 testing will proceed in the following phases: optional offline training; preparation of enrollment templates;  
 72    preparation of verification templates; and matching. Note that training, template creation, and matching may all be  
 73    performed as separate processes. These are detailed in Table 2.

74                          **Table 2 – Functional summary of the 1:1 application**

Phase	Description	Performance Metrics to be reported by NIST
Initialization	Function to read configuration data, if any.	None
Enrollment	Given $K \geq 1$ input images of an individual, the implementation will create a proprietary enrollment template. That is, <code>createTemplate(role=FRVT::TemplateRole::Enrollment_11)</code> will be called. NIST will manage storage of these templates.	Statistics of the time needed to produce a template. Statistics of template size. Rate of failure to produce a template
Verification	Given $K \geq 1$ input images of an individual, the implementation will create a proprietary verification template. That is, <code>createTemplate(role=FRVT::TemplateRole::Verification_11)</code> will be called. NIST will manage storage of these templates.	Statistics of the time needed to produce a template. Statistics of template size. Rate of failure to produce a template.
Matching (i.e. comparison)	Given a proprietary enrollment and a proprietary verification template, compare them to produce a similarity score.	Statistics of the time taken to compare two templates. Accuracy measures, primarily reported as DETs, including for partitions of the input datasets.

75

76    NIST requires that these operations may be executed in a loop in a single process invocation, or as a sequence of independent process  
 77    invocations, or a mixture of both.

78    **4.4. API**79    **4.4.1. Interface**

80    The software under test must implement the interface `Interface` by subclassing this class and implementing each  
 81    method specified therein.

	C++ code fragment	Remarks
1.	class Interface	
2.	{	
3.	public:	
4.	virtual ReturnStatus initialize( const std::string &configDir ) = 0;	
5.	virtual ReturnStatus createTemplate( const Multiface &faces, TemplateRole role, std::vector<uint8_t> &templ, std::vector<EyePair> &eyeCoordinates) = 0;	
6.	virtual ReturnStatus matchTemplates( const std::vector<uint8_t> &verifTemplate, const std::vector<uint8_t> &enrollTemplate, double &similarity) = 0;	
7.	static std::shared_ptr<Interface> getImplementation();	Factory method to return a managed pointer to the <code>Interface</code> object. This function is implemented by the submitted library and must return a managed pointer to the <code>Interface</code> object.
8.	};	

82  
 83    There is one class (static) method declared in `Interface.getImplementation()` which must also be implemented  
 84    by the implementation. This method returns a shared pointer to the object of the interface type, an instantiation of the  
 85    implementation class. A typical implementation of this method is also shown below as an example.  
 86

	C++ code fragment	Remarks
	#include "frvt11.h"  using namespace FRVT_11;  NullImpl:: NullImpl () { }  NullImpl::~ NullImpl () { }  std::shared_ptr<Interface> Interface::getImplementation() { return std::make_shared<NullImpl>(); }  // Other implemented functions	

87    **4.4.2. Initialization**

88    The NIST test harness will call the initialization function in Table 3 before calling template generation or matching. This  
 89    function will be called BEFORE any calls to `fork()`<sup>1</sup> are made.

90    **Table 3 – Initialization**

Prototype	ReturnStatus initialize( const string &configDir);	Input
Description	This function initializes the implementation under test. It will be called by the NIST application before any call to <code>createTemplate()</code> or <code>matchTemplates()</code> . The implementation under test should set all parameters. This function will be called N=1 times by the NIST application, prior to parallelizing M >= 1 calls to <code>createTemplate()</code>	

<sup>1</sup> <http://man7.org/linux/man-pages/man2/fork.2.html>

	via <code>fork()</code> .	
Input Parameters	configDir	A read-only directory containing any developer-supplied configuration parameters or run-time data files. The name of this directory is assigned by NIST, not hardwired by the provider. The names of the files in this directory are hardwired in the implementation and are unrestricted.
Output Parameters	none	
Return Value	See <a href="#">General Evaluation Specifications</a> document for all valid return code values.	

91      **4.4.3.        Template generation**

92      The function of Table 4 supports role-specific generation of template data. Template format is entirely proprietary. Some  
 93      of the proposed datasets include  $K > 2$  image per person for some persons. This affords the possibility to model a  
 94      recognition scenario in which a new image of a person is compared against all prior images. Use of multiple images per  
 95      person has been shown to elevate accuracy over a single image.

96      For this test, NIST will enroll  $K \geq 1$  images under each identity. The method by which the face recognition  
 97      implementation exploits multiple images is not regulated. The test seeks to evaluate developer provided technology for  
 98      multi-presentation fusion.

99      This document defines a template to be the result of applying feature extraction to a set of  $K \geq 1$  images. An algorithm  
 100     might internally fuse  $K$  feature sets into a single model or maintain them separately. In any case, the resulting proprietary  
 101     template is contained in a contiguous block of data. All verification functions operate on such multi-image templates.

102

103                          **Table 4 – Template generation**

Prototypes	ReturnStatus createTemplate( const Multiface &faces, TemplateRole role, std::vector<uint8_t> &templ, std::vector<EyePair> &eyeCoordinates);		
	Input		
	Input		
	Output		
	Output		
Description	Takes a Multiface and outputs a proprietary template and associated eye coordinates. The vectors to store the template and eye coordinates will be initially empty, and it is up to the implementation to populate them with the appropriate data. In all cases, even when unable to extract features, the output shall be a template that may be passed to the matchTemplates() function without error. That is, this routine must internally encode "template creation failed" and the matcher must transparently handle this.  Note: In the rare event that more than one face is detected in an image, features should be extracted from the foreground face, that is, the largest face in the image.		
Input Parameters	faces	Implementations must alter their behavior according to the number of images contained in the structure and the TemplateRole type.	
	role	Label describing the type/role of the template to be generated. Valid values are FRVT::TemplateRole::Enrollment_11 or FRVT::TemplateRole::Verification_11.	
Output Parameters	templ	The output template. The format is entirely unregulated. This will be an empty vector when passed into the function, and the implementation can resize and populate it with the appropriate data.	
	eyeCoordinates	For each input image in the Multiface, the function shall return the estimated eye centers. This will be an empty vector when passed into the function, and the implementation shall populate it with the appropriate number of entries. Values in eyeCoordinates[i] shall correspond to faces[i].	
Return Value	See <a href="#">General Evaluation Specifications</a> document for all valid return code values.		

104      **4.4.4.        Matching**

105      Matching of one enrollment against one verification template shall be implemented by the function of Table 5.

**Table 5 – Template matching**

Prototype	ReturnStatus matchTemplates( const std::vector<uint8_t> &verifTemplate, const std::vector<uint8_t> &enrollTemplate, double &similarity);	Input
		Input
		Output
Description	Compare two proprietary templates and output a similarity score, which need not satisfy the metric properties. When either or both of the input templates are the result of a failed template generation (see Table 4), the similarity score shall be -1 and the function return value shall be <code>VerifTemplateError</code> .	
Input Parameters	verifTemplate	A verification template from <code>createTemplate(role=Verification_11)</code> . The underlying data can be accessed via <code>verifTemplate.data()</code> . The size, in bytes, of the template could be retrieved as <code>verifTemplate.size()</code> .
	enrollTemplate	An enrollment template from <code>createTemplate(role=Enrollment_11)</code> . The underlying data can be accessed via <code>enrollTemplate.data()</code> . The size, in bytes, of the template could be retrieved as <code>enrollTemplate.size()</code> .
Output Parameters	similarity	A similarity score resulting from comparison of the templates, on the range [0,DBL_MAX].
Return Value	See <a href="#">General Evaluation Specifications</a> document for all valid return code values.	